



SWING GATES



Ezi Security Systems
SERIOUS SECURITY IS EZI

SWING GATES

The Ezi Swing Gate system is designed and engineered to Ezi's exacting calculations and standards with a strong emphasis on safety.

Each Ezi swing gate system comprises the following important mechanical modules: hinge support post, the gate leaf and the end post.

Each gate is bolted to a concrete footing that is engineered to provide adequate weight to counter-balance the system. The combination of gate design and concrete footing allows the gate to swing out over the relevant road opening, without tipping or sagging.

Up to 6 metre road widths (for a single gate) are standard within our product range. 12 metre road coverage is available by utilising our dual gate option. Each Ezi Swing Gate is designed with automation features as standard.

An industrial three-phase drive motor, PLC control logic, frequency inverter and proximity sensors are some of the highly advanced products used in Ezi's product range.

Each Ezi PLC system allows for special features and auxiliary equipment to be added, without major parts redundancy, e.g. traffic light controls, card access readers.

Our main support and bearing platform is well balanced and provides smooth and efficient operations. Each Swing Gate system operates at high speed, with an 8 second opening time. Soft closure and torque control for wind situations is standard with every system.

The Ezi Swing Gate system operates utilising a lever arm assembly connecting the gate leaf directly to our 40mm motor/gearbox output shaft. All lever arms are painted safety yellow, with our motor housing being powder-coat painted gloss black.

Every Ezi system has been designed with safety in mind. Our visual and audible warning systems are standard. An array of photo-electric safety cells and vehicle induction loops also form part of the standard product.

The Ezi Swing Gate system is not affected by road crowns, kerbs or falls for drainage in roads. All associated works to install an Ezi Swing Gate system are performed off to the side of the relevant road, thereby avoiding closures which can be inconvenient and costly to your business.

The Ezi Swing Gate system has no equal in the industrial market place. Each system will perform reliably all day, every day.

Our wealth of knowledge and experience gained over the years has enabled Ezi to evolve and develop this premium product to suit a variety of ever-changing environments.

The Swing Gate systems, as developed by Ezi, are purpose-built for the industrial market place. The key consideration is safety of operation without compromise to security. High levels of performance, aesthetically pleasing design and unrivalled reliability are also features.

The high performance and advanced technology built into each Ezi Swing Gate will ensure reliable operation for many years to come. Ezi boasts a large end-user customer base and continues to provide product and service to Australia's leading corporations.

** EZI MASTER MANUAL SWING GATE ARE ALSO AVAILABLE








STANDARD TECHNICAL SPECIFICATION

Gate width (Single leaf)	3 metres to 6 metres (variable)
Gate width (Dual leaf)	3 metres to 12 metres (variable)
Gate height	2200mm standard
Gate clearance	150mm nominal
Gate erected height	2350mm nominal
Gate frame	100mm sq RHS (variable)
Gate end post	100mm sq RHS
Gate end post height	2430mm nominal
Gate hinge post	250mm sq RHS
Gate finish	Hot dip galvanised (optional 2 pack paint)
Gate hinge bearings	Fully sealed and adjustable
Motor release	Motor brake handle
Motor	0.55kw three phase brake motor
Gearbox	Helical (ratio's variable)
Brake	Electromagnetic, 240v power to release

Drive arm	Articulated lever arm
Control logic	True PLC, 24v DC
Drive logic	VSD 240v single phase to 240v three phase
Power supply	Regulated 240v to 24v DC
Control enclosure	IP56, mild steel, painted, 400 x 600 x 200 (stainless steel optional)
Position sensing	Proximity sensors, NPN 24v DC
Safety (pedestrian)	Photo Beam Set (transmit and receiver type)
Safety (vehicle)	Inductive loops & detectors, 24v DC, fail safe
Gate duty cycle	True 100% cycling as per Ezi's standard
Power requirement	240v, 15 amp supply
Current draw	4 amp running, 8 amp start up
Strobe light	Orange, 24v DC
Piezo	24v DC (pulsing)



STANDARD TECHNICAL DRAWING

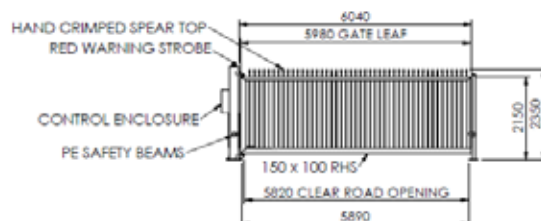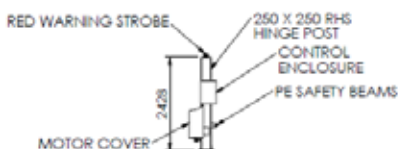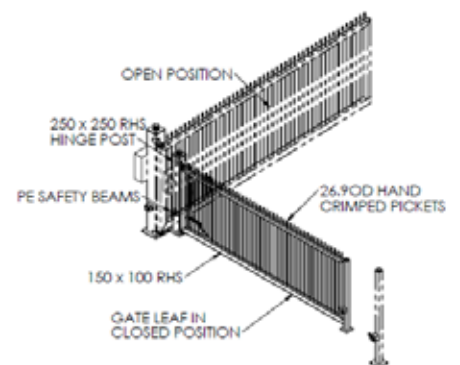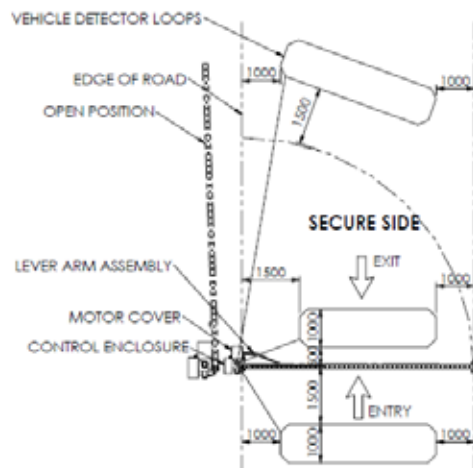



Ezi Security Systems


S E R I O U S S E C U R I T Y I S E Z I

OUR PRODUCTS AVAILABLE

CRASH RATED RANGE



TRADITIONAL RANGE



WERRA RANGE



FOLLOW US ON



AUSTRALIA NATIONAL

1300 558 304

11 Cooper Street Smithfield NSW 2164

www.ezisecurity.com.au

Email: sales@ezisecurity.com