

TRUCKSTOPPER 6-30 (BSI PAS68:2010 V/7500 (N2)/48/90/2.8/0.00)

PAS 68 Low Cost Shallow Mount Single Fixed/Removable Bollard



Supplier of anti-terrorist bollards across Australia and worldwide



Application

- ▶ Airport
- ▶ Sports Arenas
- ▶ Retail Parks
- ▶ Police Stations
- ▶ Critical Infrastructure
- ▶ Government Buildings
- ▶ Conference Centres

TRUCKSTOPPER 6-30

(Single shallow mount fixed/removable bollard)

The new technology TRUCKSTOPPER 6-30 has a small super light weight base plate - 46kg only. This patent pending design is a technology break through in a removable single shallow footing bollard systems of 200mm deep, that will stop a 7.5 ton truck at 10 mph or 48 km at 90 degrees from breaking through the security line. If access is needed the bollard can be removed in minutes.

The 200mm deep single shallow bollard will also reduce the need to re divert utilities. The system is the most economical on the market and very aesthetically pleasing. This bollard is small and easy to install. This system is designed to follow the contours of the ground and can go around corners. If the post gets damaged after an attack they can be removed from the slipper box and replaced with no need to remove or replace the concrete foundation.

Once fitted the only maintenance is to repaint when needed or the bollard can be covered with a mild or stainless steel shroud.

“New Technology breakthrough - foundation only 200mm deep”

TRUCKSTOPPER 6-30 PAS68/IWA14 VEHICLE PERFORMANCE CLASSIFICATION						
VEHICLE TEST WEIGHT	VEHICLE CLASS	VEHICLE SPEED	VEHICLE ANGLE	VEHICLE PENETRATION	25KG+ DISPERSION	FOOTING DEPTH
V/7500 KG	N2	48	90	2.8	0.00	200
V/7200	N2A	48	90	3.0		

TRUCKSTOPPER 6-30 (BSI PAS68:2010 V/7500 (N2)/48/90/2.8/0.00)

PAS 68 Low Cost Shallow Mount Single Fixed/Removable Bollard



Spring bollard cover side view.

Spring bollard front side view.




Safetyflex also offer a selection of shrouds and street furniture. Details available on request.

Product Specification:

Height above ground: 900mm

Footing Depth: Only 200mm

Options: Stainless steel & mild steel shroud available

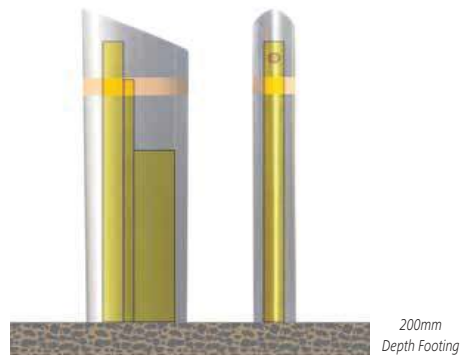

Foundation only 200mm deep x 900mm wide x 1200mm long.
Tested and passed as a single removable bollard

