

TRUCKSTOPPER 7-40

(BSI PAS68:2010 V/7500 (N2)/64/90/7.1/14.8; IWA 14-2013 BOLLARD V/7500 (N2A)/64/45.3.3)

PAS 68 Low Cost Shallow Mount Single Fixed/Removable Bollard



TRUCKSTOPPER 7-40

(Single shallow mount fixed/removable bollard)

The new technology TRUCKSTOPPER 7-40 has a small and super light weight base plate (46kg only). This patent pending design is a technology break through in a removable single shallow footing bollard systems of 200mm deep that will stop a 7.5 tonne truck at 40 mph or 64kph at 90 degrees from breaking through security line. If access is needed the bollard can be removed in minutes.

The 200mm deep shallow single bollard will also reduce the need to re-divert utilities. The system is the most economical on the market and very aesthetically pleasing. This system is the most economical on the market and very aesthetically pleasing. This bollard is small and easy to install. This system is designed to follow the contours of the ground and can go around corners. If the posts gets damaged after an attack they can be removed from the slipper box without removing or replacing the concrete foundation.

Once fitted the only maintenance is to repaint when needed or the bollard can be covered with a mild or stainless steel shrouds

Application

- ▶ Airport
- ▶ Sports Arenas
- ▶ Retail Parks
- ▶ Police Stations
- ▶ Critical Infrastructure
- ▶ Government Buildings
- ▶ Conference Centres

TRUCKSTOPPER 7-40 PAS68 VEHICLE PERFORMANCE CLASSIFICATION

VEHICLE TEST WEIGHT	VEHICLE CLASS	VEHICLE SPEED	VEHICLE ANGLE	VEHICLE PENETRATION	25KG+ DISPERSION	FOOTING DEPTH
V/7500 KG	N2	64	90	7.1	14.8	200
V/7200 KG	N2A	64	45	3.3		200

"New Technology breakthrough - foundation only 200mm deep"

TRUCKSTOPPER 7-40

(BSI PAS68:2010 V/7500 (N2)/64/90/7.1/14.8; IWA 14-2013 BOLLARD V/7500 (N2A)/64/45:3.3)

PAS 68 Low Cost Shallow Mount Single Fixed/Removable Bollard




Supplier of anti-terrorist bollards across Australia and worldwide



Safetyflex also offer a selection of shrouds and street furniture. Details available on request

Spring bollard cover side view.

Spring bollard front side view.

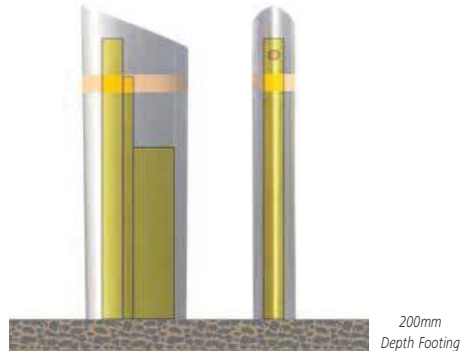

Foundation only 200mm deep x 900mm wide x 1200mm long.
Tested and passed as a single removable bollard

Product Specification:

Height above ground: 900mm

Footing Depth: Only 200mm

Options: Stainless steel & mild steel shroud available