

CLD Securus S2

High security fencing system to LPS 1175 B3 (SR2) Issue 8



Minimum of 3 minutes delay against attack

Securus is CLD's range of specialist security fencing. Traditionally referred to as prison mesh or 358 mesh, the Securus range has been updated complete flexibility – the panels can be swapped out to change the security rating as the needs of the site change. Securus S3 has been certified by the Loss Prevention Certification Board to provide a minimum of 3 minutes delay against attack.

For full technical information please **see overleaf**.


Ideal for

- Data Centres
- Utilities
- MoD
- Ports & Airports

Conforms to



Isometric View

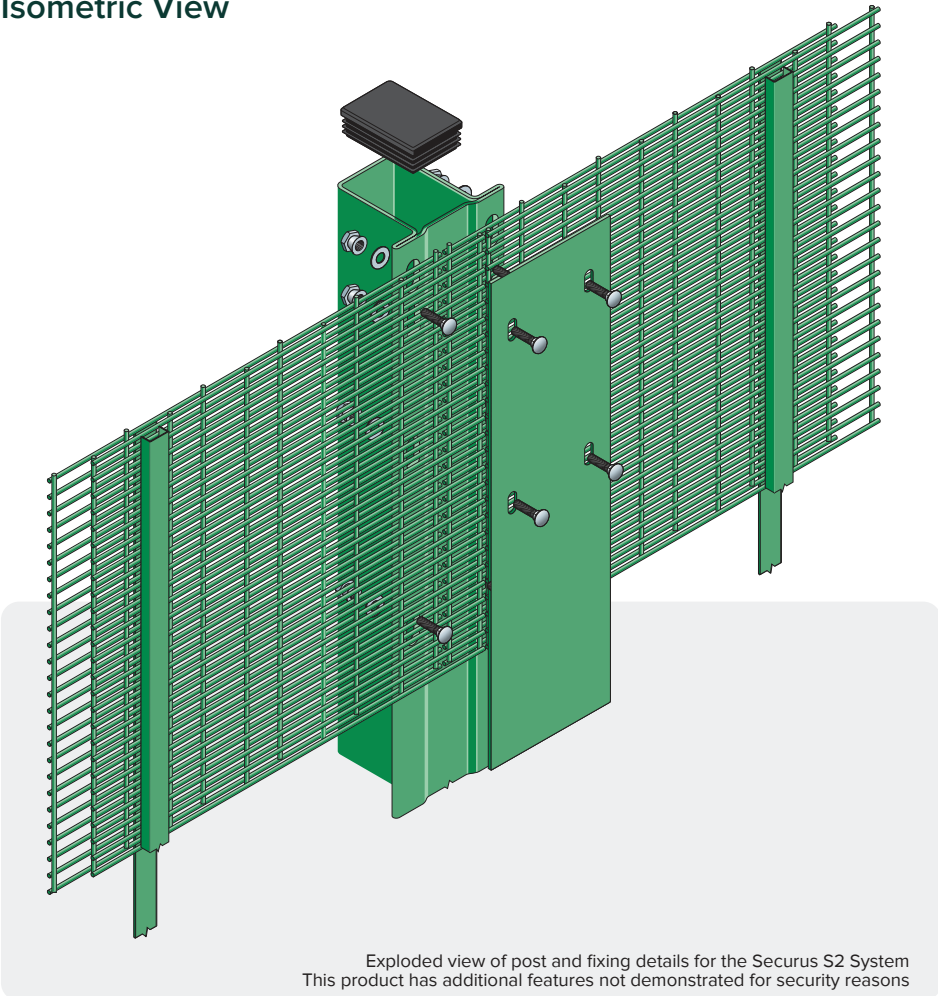

Exploded view of post and fixing details for the Securus S2 System
This product has additional features not demonstrated for security reasons

Key Features

- Double layer mesh system
- Off-Site assembled fence panel cassettes
- Reduced installation time vs Securus AC
- Full range of RAL colours available

Scan the QR code to find out more



CLD Securus S2

High security fencing system to LPS 1175 B3 (SR2) Issue 8



Product Technical Information

Standard	LPS 1175 B3 (SR2) Issue 8 BS EN ISO 1461:2009 Secured by Design - Police Preferred Specification	BS1722-14: 2017 BS EN 13438:2013
Panel type:	Mesh and wire. Double layered mesh cassette system. High aluminium content galvanised and powder coated to minimum 80 microns dft. (Note: Fence Cassettes are supplied assembled for ease of install, mechanical lifting required – can be supplied unassembled)	
Panel width:	2518mm	
Wire Diameter	4mm	
Mesh Size	76.2 x 12.5 mm mesh	
Height	2440mm to 5000mm	
Nominal Height	2.4m to 5.0m	
Finish	Polyester powder-coated to minimum 60 microns. Any RAL colour including marine grade and metallics.	
Top Edge Projection	nil	
Panel Installation	Bottom of panel minimum 100mm below ground	
Topping Options	Barbed and razor wire, cranked and straight	
Posts	Special flanged post, galvanised after manufacture and polyester powder-coated to match fencing.	
Post Dimensions	80mm x 60mm	
Post Centres	2528mm +/-15mm	
Fixings	120mm x 6mm full length clamp bar. M8 Stainless Steel cup square bolt (min 30mm)	
Foundations	Set posts in holes minimum 450mm square x 950mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and fence height.	
Warranty	Minimum of 15 years against manufacturing defects.	

Your local partner



HEAD OFFICE
11 Cooper St
Smithfield NSW 2164
Australia

Phone: 1300 558 304
Email: Sales@ezisecurity.com

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time.

Exact dimensions should be confirmed prior to installation

Document Reference - 20220726_CLD_Securus_S2

CALL 01270 764751 VISIT WWW.CLD-FENCING.COM