

CLD Securus S3

High security fencing system to LPS 1175 C5 (SR3) Issue 8



Minimum of 5 minutes delay against attack

Securus is CLD's range of specialist security fencing. Traditionally referred to as prison mesh or 358 mesh, the Securus range has been updated complete flexibility – the panels can be swapped out to change the security rating as the needs of the site change. Securus S3 has been certified by the Loss Prevention Certification Board to provide a minimum of 5 minutes delay against attack.

For full technical information please **see overleaf**.


Ideal for

- Data Centres
- Utilities
- MoD
- Ports & Airports

Conforms to



Isometric View

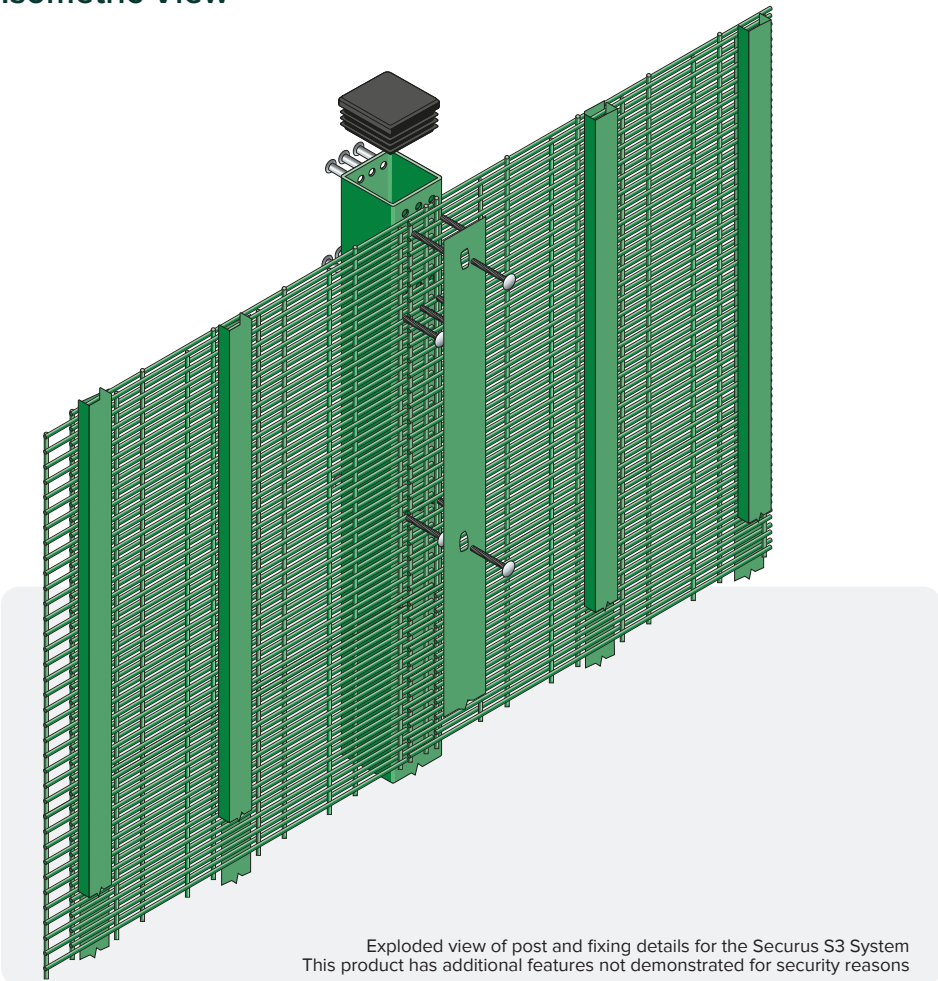

Exploded view of post and fixing details for the Securus S3 System
This product has additional features not demonstrated for security reasons

Key Features

- Can be adapted for use With third-party PID systems
- 358 Anti Climb double layer Mesh fencing system
- Full length clamp bar
- No visible fixings on Security bars
- Full range of RAL colours available

Scan the QR code to find out more



CLD Securus S3

High security fencing system to LPS 1175 C5 (SR3) Issue 8



Product Technical Information

Standard	LPS 1175 C5 (SR3) Issue 8 BS EN ISO 1461:2009 Secured by Design - Police Preferred Specification	BS1722-14: 2017 BS EN 13438:2013
Panel type:	Mesh and wire. Double layered mesh cassette system. Galvanised and powder coated to minimum 80 microns dft. (Note: Fence Cassettes are supplied assembled for ease of install, mechanical lifting required – can be supplied unassembled)	
Panel width:	2518mm	
Wire Diameter	4mm	
Mesh Size	76.2 x 12.5 mm mesh	
Height	2440mm to 5000mm	
Nominal Height	2.4m to 5.0m	
Finish	Polyester powder-coated to minimum 80 microns. Any RAL colour	
Top Edge Projection	nil	
Panel Installation	Bottom of panel minimum 100mm below ground. Base plated and no ground bury options also available.	
Topping Options	Barbed and razor wire, cranked and straight	
Posts	SHS, galvanised after manufacture and polyester powder-coated to match fencing	
Post Dimensions	100mm x 100mm	
Post Centres	2528mm +/- 9mm	
Fixings	100mm x 5mm full length clamp bar. M8 Stainless Steel cup square bolt (min 100mm) and SafeTFix™ nut	
Foundations	Set posts in holes minimum 450mm square x 950mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and fence height.	
Warranty	Minimum of 15 years against manufacturing defects.	

Your local partner



HEAD OFFICE
11 Cooper St
Smithfield NSW 2164
Australia

Phone: 1300 558 304
Email: Sales@ezisecurity.com

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time.

Exact dimensions should be confirmed prior to installation

Document Reference - 20220726_CLD_Securus_S3

CALL 01270 764751 VISIT WWW.CLD-FENCING.COM